



Installation steps

1. First, create a 0.78-inch installation hole in the fixture or junction box.
2. Pass the threaded part through the installation hole.
3. Remove the gasket and nut, and first attach the gasket tightly to the threaded part.
4. Tighten the nut to complete the installation.

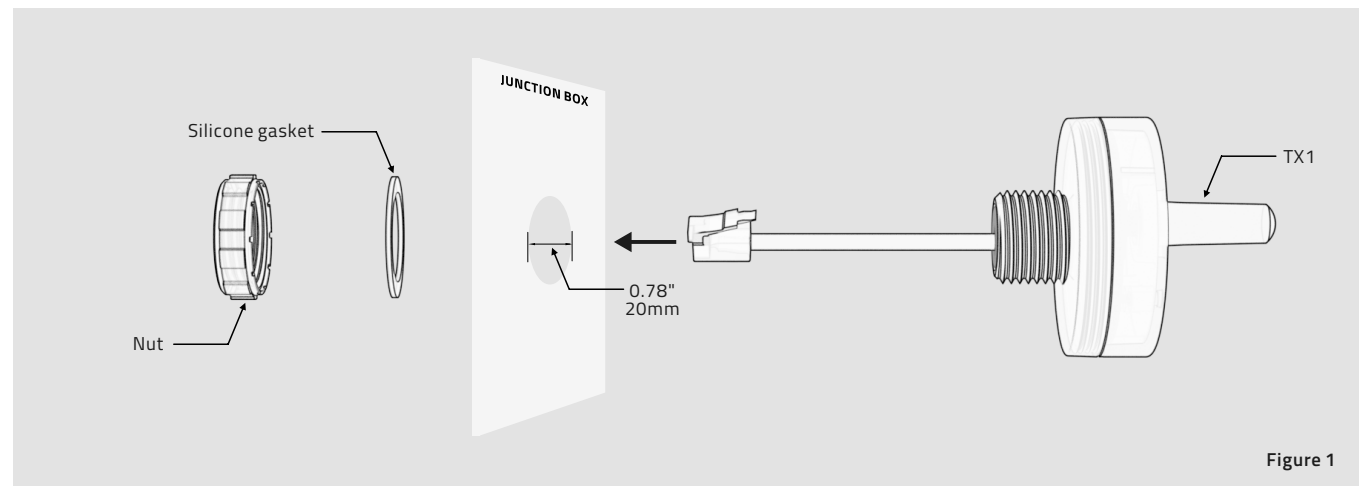


Wiring

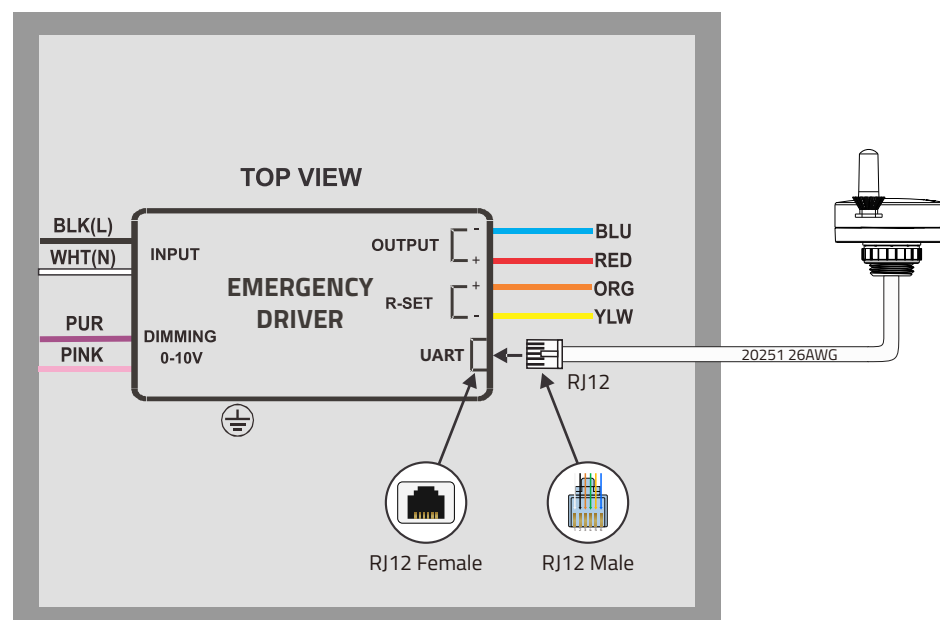

Dimensions

Unit: inch/mm

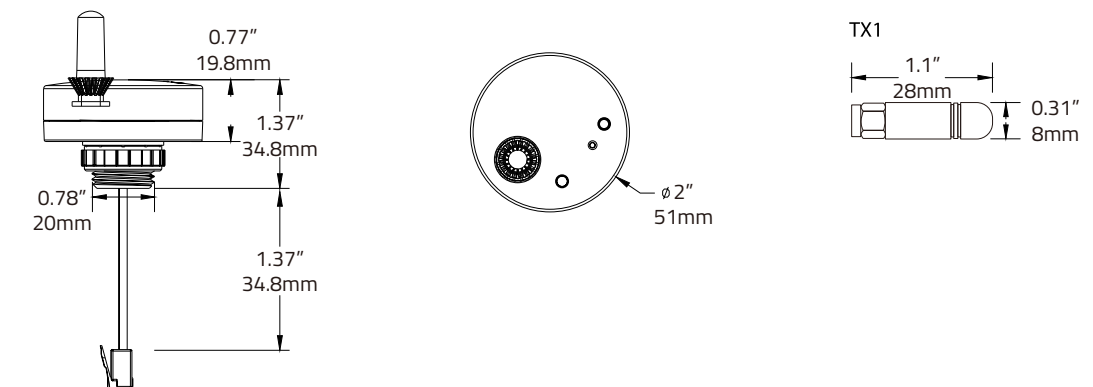

TIPS: This Bluetooth device is compatible with Keilton+Autani lighting control system only.

How to Install Keilton+Autani APP?

Scan below QR code for downloading the APP.



How to Control Lights with a Phone?

Scan to download Keilton+Autani APP instruction



Warranty Information

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

Contact: sales@litetrace.com